

DK50 2V/50

compressor designed for demanding air supply of laboratories, gas-separators (N₂, O₂), robots, packaging equipment, etc.

DK50 2V/50

- without soundproofing box

DK50 2V/50S





- with soundproofing box

DK50 2V/50/M

- without soundproofing box, with adsorption dryer

DK50 2V/50S/M

- with soundproofing box, with adsorption dryer

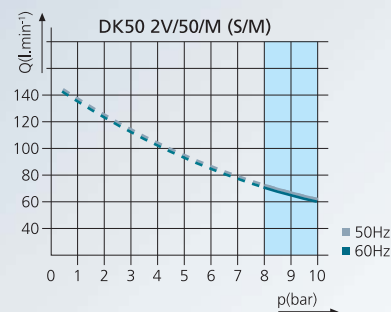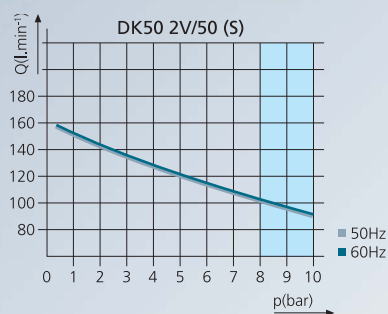

Technical specification	DK50 2V/50
Nominal voltage (V/Hz)	230/50 (60) 3x400/ 50
Compressor efficiency (L·min ⁻¹ /5 bar)	140
Working pressure of compressor (bar)*	6 - 8
Air tank capacity (lit.)	50
Noise level without box (dB [A])	≤ 71
Noise level with box (dB [A])	≤ 56
Dimensions without box (w x l x h)(mm)	595x475x770
Dimensions with box (w x l x h)(mm)	750x715x1015

* Other working pressures on demand.
Technical modifications are subject to change.

--- The field of pressures of non optimal operation of dryer.