

DK50 PLUS MOBILE

DK50 2V MOBILE

compressor designed for demanding air supply of laboratories, autosamplers, robots, printing /folding-equipment etc.



DK50 PLUS MOBILE

- compressor DK50 PLUS in soundproofing box MOBILE

DK50 PLUS/M MOBILE







- compressor DK50 PLUS with adsorption air dryer (with a controlled regeneration) in soundproofing box MOBILE

DK50 2V MOBILE

- compressor DK50 2V in soundproofing box MOBILE

DK50 2V/M MOBILE

- compressor DK50 2V with adsorption air dryer (with a controlled regeneration) in soundproofing box MOBILE

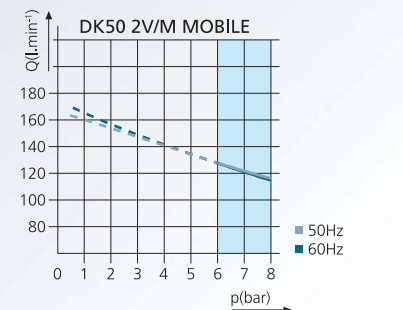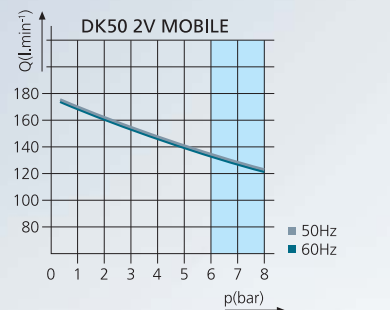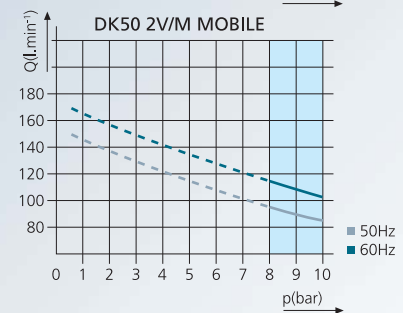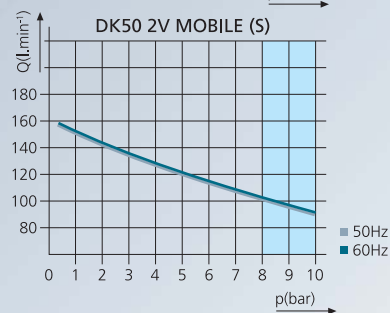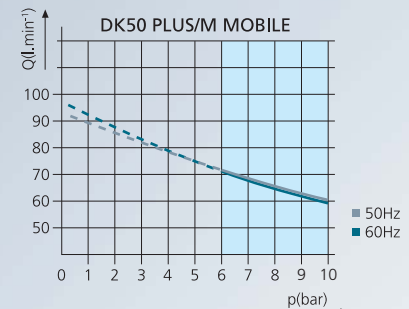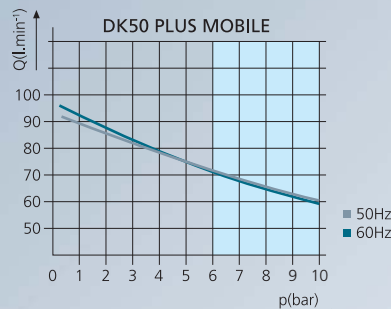

Technical specification	DK50 PLUS MOBILE	DK50 2V MOBILE
Nominal voltage (V/Hz)	230/ 50(60) 110/60	230/ 50(60) 110/60
Compressor efficiency (L.min⁻¹/ 5 bar)	75	140
Compressor efficiency with dryer (L.min⁻¹/ 5 bar)	75	135
Air tank capacity (L)	25	25
Working pressure of compressor (*) (bar)	6 - 8	6 - 8
Noise level (dB [A])	≤ 57	≤ 62
Dimensions (w x l x h)(mm)	580x700x1010	580x700x1010

* Other working pressures on demand.
Technical modifications are subject to change.

--- The field of pressures of non optimal operation of dryer.