

DK50 PLUS

DK50 2V

compressor designed for demanding air supply of laboratories, autosamplers, robots, printing/folding equipment etc., with higher air consumption.

DK50 PLUS

DK50 2V

- without soundproofing box

DK50 PLUS S

DK50 2V S

- with soundproofing box

DK50 PLUS/M







DK50 2V/M

- without soundproofing box, with adsorption dryer (controlled regeneration)

DK50 PLUS S/M

DK50 2V S/M

- with soundproofing box, with adsorption dryer (controlled regeneration)

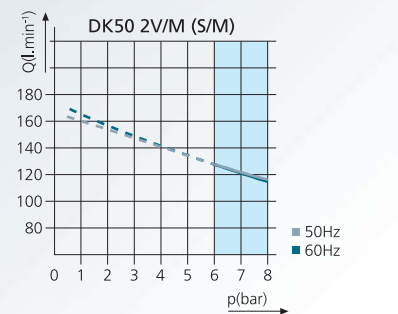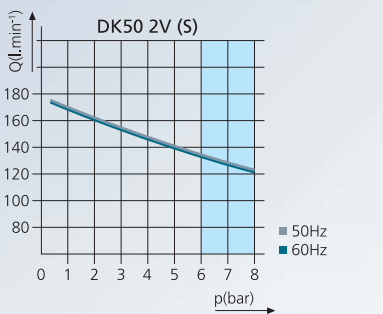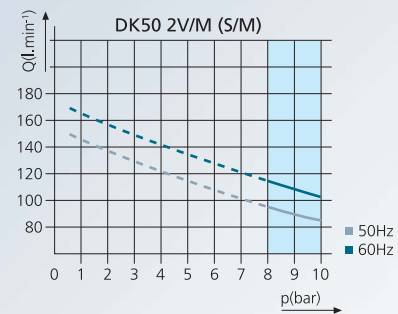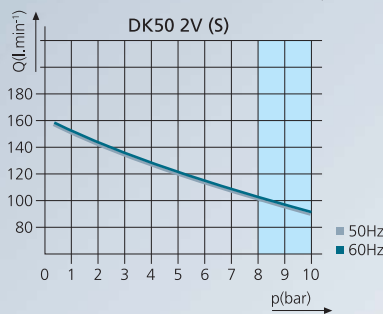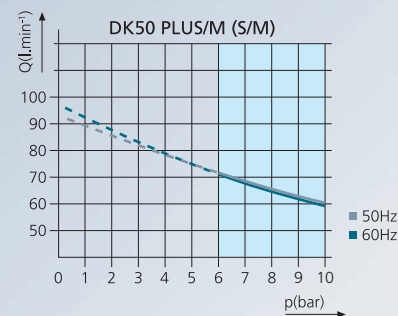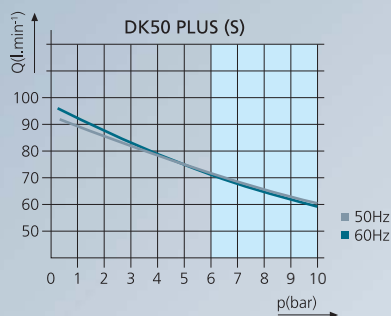

Technical specification	DK50 PLUS	DK50 2V
Nominal voltage (V/Hz)	230/ 50(60) 110/ 60	230/ 50(60) 3x400/ 50
Compressor efficiency (l.min⁻¹/5 bar)	75	140
Compressor efficiency with dryer (l.min⁻¹/5 bar)	75	135
Working pressure of compressor (*) (bar)	6 - 8	6 - 8
Air tank capacity (lit.)	25	25
Noise level without box (dB [A])	≤ 66	≤ 71
Noise level with box (dB [A])	≤ 47	≤ 53
Dimensions without box (w x l x h)(mm)	460x460x690	460x460x690
Dimensions with box (w x l x h)(mm)	560x665x860	560x665x860

* Other working pressures on demand.
Technical modifications are subject to change.

--- The field of pressures of non optimal operation of dryer.